


DHM 1010 PHOTOLUMINESCENT DOOR HANDLE MARKER

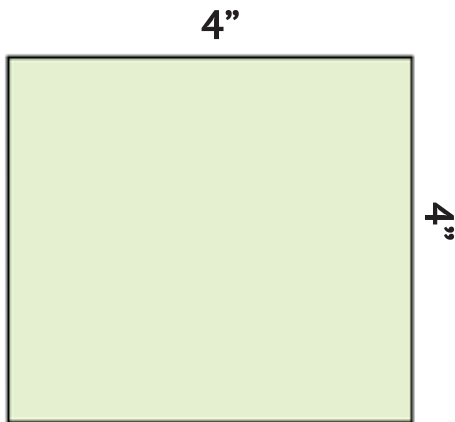

The DHM1010 Photoluminescent Door Handle Marker is designed to indicate the outline of door handles. It will increase visibility and enhance egress speed in all light conditions. The non-radioactive, non-toxic photoluminescent marking is visible for many hours after the lights go out, having been charged from sunlight or artificial light.

Weight: 0.274 lbs/sign.

THE ECOGLO DHM 1010 MEETS THE FOLLOWING BUILDING, FIRE & LIFE SAFETY CODES:

- IBC/IFC (Section 1025 – Luminous Egress Path Markings) and (Section 1025)
- NFPA 101
- NYC Building Code 2018 (Section BC 1025 Luminous Egress Path Markings)
- NYC LL 141 of 2013 (Section BC 1025 Luminous Egress Path Markings)
- NYC LL 26 of 2004 Reference Standard 6-1
- California Building Code Section 1025 Exit Passageways
- Connecticut State Fire Safety Code Section 1026 Floor Proximity Egress Path Markings

BENEFITS AND TECHNICAL DETAILS: Ecoglo DHM1010 meets or exceeds the performance criteria specified in the following tests or standards:

BRIGHTNESS

High visibility in dark or light conditions.

- ASTM E2073-02, Standard Test Method for Photopic Luminance of Photoluminescent (Phosphorescent) Markings.
- ISO 17398:2004 Clause 7.11, Safety Colors and Safety Signs- Classification, Performance and Durability of Safety Signs.
- UL 1994 Listed – IMZI.SA3353
- UKLC 572 Listed – IMZI7.SA3353

WASHABILITY

Easy Cleaning.

- ASTM D4828-94(2003), Standard Test Methods for Practical Washability of Organic Coatings.

RADIOACTIVITY

No radioactivity or toxicity.

- Toxicity: Bombardier SMP 800-C (2000), Toxic Gas Generation Test.

FLAMMABILITY

Does not burn.

- ASTM E162-02, Standard Test Method for Surface Flammability of Materials Using a Radiant Heat Energy Source.

CONTACT ECOGLO INC. FOR A QUICK QUOTE OR TO OBTAIN MORE INFORMATION ABOUT OUR EMERGENCY LIGHTING PRODUCTS.

